


ZIBO JINGGAN REFRACTORY IMPORT AND EXPORT CO.,LTD

Address:NO. 3, Yanhe Road, Boshan, Zibo, Shandong, China
Email:wp@cnjingganrefractory.com/sdwenping@163.com
Contact:Rose Tel/Wechat:+86-13275332819
Tel:86-533-4188518 Fax:86-533-4188518

PVC Plastics-steel For Doors and Windows

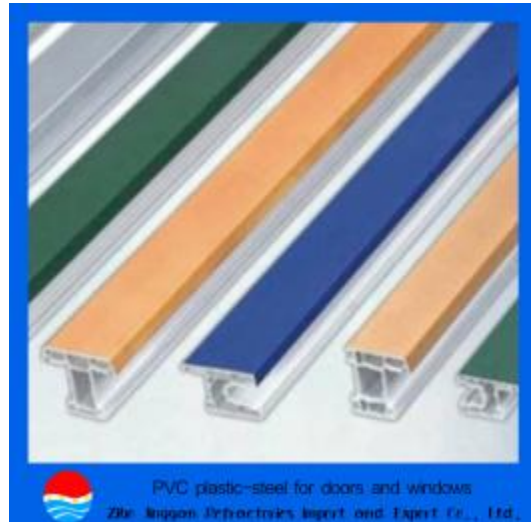

1.Description: The product is used at - 30 °C ~ 70 °C, not aging, not embrittlement, and the service life can reach 50 years. And the waterproof performance, impact resistance, mechanical properties, especially the fillet strength are very good.

2. Main features:

- 1) Main ingredients: PVC, stabilizer, colorant, filler, UV absorber
- 2) Heat preservation and energy conservation: most of the products are of cavity structure, with good heat insulation performance and low thermal conductivity, which is only 1 / 357 of the steel and 1 / 1250 of the aluminum.
- 3) Air tightness: Rubber and plastic sealing strip and wool strip are installed at all gaps of plastic steel doors and windows, whose air tightness is much higher than that of aluminum alloy doors and windows
- 4) Water tightness: due to the unique multi cavity structure of the product, there is an independent drainage cavity, which can effectively drain the water from the frame or fan.

ZIBO JINGGAN REFRACTORY IMPORT AND EXPORT CO.,LTD

5) Wind pressure resistance: 1.5 ~ 3mm thick steel lining is added in the independent product mold cavity, and the wind pressure resistance strength can reach more than 6 levels

6) Corrosion resistance: the product adopts unique formula, has good corrosion resistance, and its service life is 10 times of steel window

7) Weather resistance: the product can be used in the environment of - 50 °C ~ 70 °C for a long time, with a service life of up to 50 years.

3. Product specification: 60 type, 65 type, 80 type, 88 type, etc., various colors, bright and beautiful


4. Application of PVC Plastics-steel For Doors and Windows: door and window profile

5, Main technical indicators of PVC Plastics-steel For Doors and Windows


ITEM	UNIT	TECHNICAL INDEX
Anti aging time	h	>6000
Softening temperature	°C	>75
Modulus of elasticity in bending	Mpa	>22000
Heating size change rate	%	≤0.4
After heating at 150 °C		No bubbles, cracks, pits, separation
Welding angle strength	Mpa	≥35

6, Pictures of PVC Plastics-steel For Doors and Windows

ZIBO JINGGAN REFRACTORY IMPORT AND EXPORT CO.,LTD

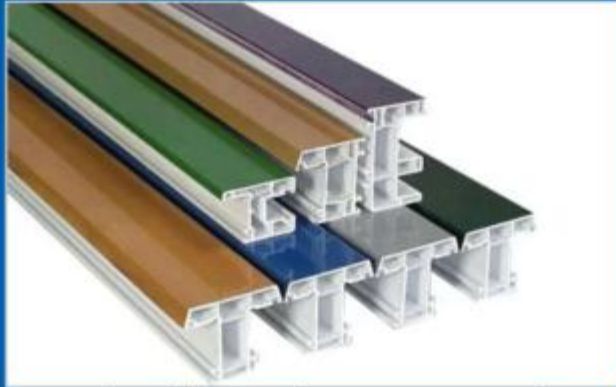

80 push pull two color coextrusion plastic
steel section series

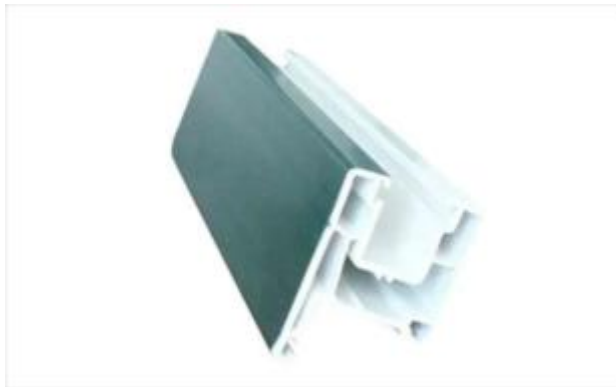

88 push pull double color coextrusion
profile section series




60 white flat opening plastic steel section series

ZIBO JINGGAN REFRACTORY IMPORT AND EXPORT CO.,LTD



60 plastic steel section series

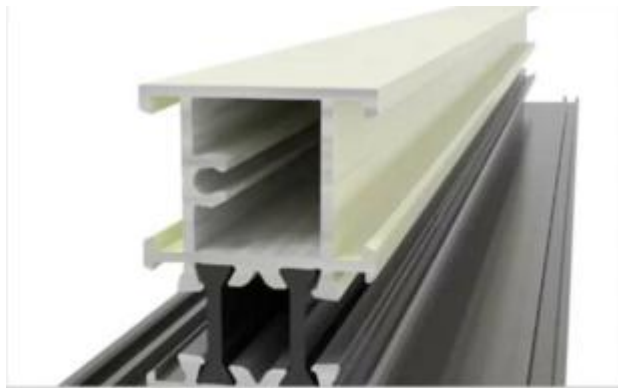


80 white push-pull plastic steel section series



65 and other section series of plastic steel profiles

ZIBO JINGGAN REFRACTORY IMPORT AND EXPORT CO.,LTD

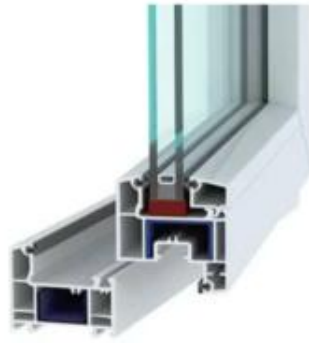

88 white push-pull profile section series

Do you want to find a professional supplier of refractory products?

Do you want to find a professional supplier of graphite electrodes?

Do you want to find a stable and credible supplier?

Then let's contact with jinggan company

Contact me:

Email:wp@cnjingganrefractory.com/sdwenping@163.com

TEL: 86-0533-4188518 / **FAX:** 86-0533-4188518

Rose:+86-13275332819(wechat/whatsapp number)